

**Weights**

Operating weight with cab and bucket (ISO 6016)	2608 kg
Transport mass (no attachment)	2477 kg
Weight reduction with canopy	-118 kg
Ground pressure with rubber tracks	30.30 kPa

**Engine**

Make / model	Yanmar / 3TNV76-PBC (Stage V)
Fuel	Diesel
Number of cylinders	3
Displacement	1116 cm <sup>3</sup>
Maximum power @ 2400 rpm (ISO 14396)	14.9 kW
Maximum torque @ 1800 rpm (SAE J1995)	66.3 Nm

**Hydraulic System**

Pump type	Dual outlet variable displacement piston pump with gear pumps
Total hydraulic capacity	94.25 L/min
Piston pump capacity	67.50 L/min
Auxiliary (AUX1) flow	53.75 L/min
Auxiliary (AUX2) flow	20.00 L/min
Auxiliary (AUX1) relief	180.00 bar
Auxiliary (AUX2) relief	179.00 bar

**Performance**

Digging force, dipperstick (ISO 6015)	15690 N
Digging force, bucket (ISO 6015)	23720 N
Drawbar pull	29080 N
Travel speed, low range	2.5 km/h
Travel speed, high range	4.3 km/h

**Slew System**

Boom swing, left	60.0°
Boom swing, right	60.0°
Slew rate	9.3 RPM

**Fluid Capacities**

Fuel reservoir	34.40 L
Hydraulic reservoir	10.20 L

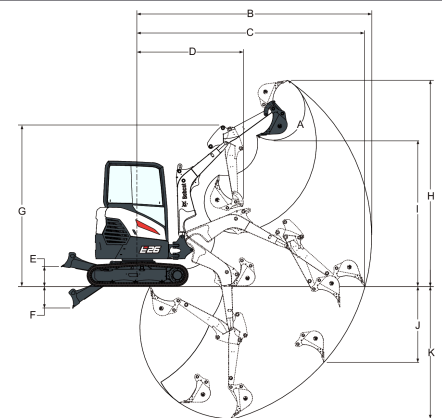
**Environmental**

Noise level LpA(EU Directive 2006/42/EC)	80 dB(A)
Noise level LWA(EU Directive 2000/14/EC)	93 dB(A)
Whole body vibration (ISO 2631-1)	0.11 ms <sup>-2</sup>
Hand-arm vibration (ISO 5349-1)	0.50 ms <sup>-2</sup>


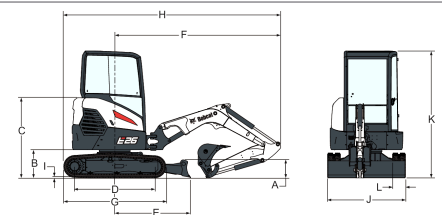
**Standard Features**

1500 mm dozer blade	Horn
250 mm rubber track	Proportional fingertip auxiliary and boom swing offset hydraulic control
Adjustable double acting auxiliary hydraulic (AUX1) with Quick Couplers	Retractable seat belt
Battery disconnect switch	Seat with high back
Blade float feature	Storage compartment
Control console locks	TOPS/ROPS/FOPS canopy * 1
Cupholder	Two-speed travel with Auto shift
Dual Direction Detent	Upper structure four-point tie down
Engine/hydraulic monitor with shutdown	Work light (boom)
Foldable and ergonomic travel pedals	Water separator
Full fuel warning alarm	Warranty: 24 months, 2000 hours (whichever occurs first)

1. Roll Over Protective Structure (ROPS) – Meets requirements of ISO 3471. Tip Over Protective Structure (TOPS) – Meets requirements of ISO 12117. Falling Object Protective Structure (FOPS) - Meets requirements of ISO 3449.

**Working Range**


(A)	185.0°	(G)	3104.0 mm
(B)	4542.0 mm	(H)	4006.0 mm
(C)	4413.0 mm	(I)	2845.0 mm
(D)	2052.0 mm	(J)	1474.0 mm
(E)	385.0 mm	(K)	2568.0 mm
(F)	420.0 mm		

**Dimensions**


(A)	319.0 mm	(J)	1500.0 mm
(B)	539.0 mm	(K)	2438.0 mm
(C)	1540.0 mm	(L)	250.0 mm
(D)	1543.0 mm	(M)	580.0 mm
(E)	1462.0 mm	(N)	705.0 mm
(F)	3192.0 mm	(O)	1755.0 mm
(G)	1965.0 mm	(P)	820.0 mm
(H)	4174.0 mm	(Q)	1741.0 mm
(I)	21.0 mm	(R)	1616.0 mm

**Options**

Object handling package (Valves, OWD, Liftye)	Additional halogen lights
TOPS/ROPS/FOPS cab	Beacon
AUX1 direct return to tank	Dlx textile suspension seat
AUX2 hydraulics	Special application kit
AUX1/AUX2/Drain on arm	L/R mirrors
Case drain line	Klac D and MS03 coupler
Auto idle	Bobcat hydr. pin grabber
Keyless ignition	Grease Gun Set (Gun + Holder in Machine)
Travel motion alarm	Demolition package (arm & bucket cylinder covers)
AM/FM MP3 radio	Hydr. coupler lines (AUX5)